

# Spirali e tubi plastici industriali

Coils and industrial plastic tubes  
Schläuche und Spiraleschläuche


SU 20



## Spirale poliuretano con terminali dritti

Polyurethane coils with straight terminals  
Polyurethanspiralen mit geraden Anschlüssen

Colore standard: azzurro  
Standard colour: light blue  
Standard Farbe: Blau

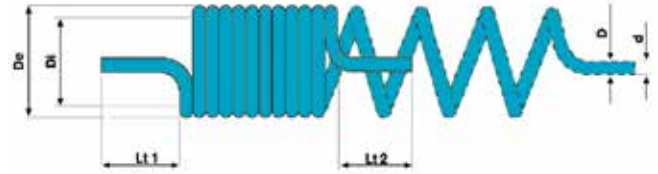

Su richiesta possiamo fornire spirali con diametri, lunghezze, colori e materiali diversi

On demand we can supply coils with diameters, lengths, colours and different materials

Auf Wunsch können wir Spiralen mit verschiedenen Durchmessern, Längen, Farben und Materialien zu liefern

Codice/Code	Diametri D. est. x d. int. Diameter D. ext. x d. int. Durchmesser D. Auß. x d. Inn	Lunghezza estesa Length tube Schlauch länge	Lunghezza lavoro Work length Betriebslänge	De x Di (mm)	Lt1 / Lt2 (mm)	Pressione di utilizzo (Bar) 23°C Working pressure (Bar) 23°C Betriebsdruck (Bar) 23°C	Pressione di scoppio (Bar) 23°C Burst pressure (Bar) 23°C Berstdruck (bar) 23°C	Temperatura di utilizzo Working temperature Betriebtemperatur	
SU20402540	4x2.5	4 mt	2.00 mt	40x30	150/500	10	32	-20°C/+60°C	1
SU20604050	6x4	5 mt	2.50 mt	40x28	150/500	11	32	-20°C/+60°C	1
SU20604075	6x4	7.5 mt	3.75 mt	40x28	150/500	11	32	-20°C/+60°C	1
SU20604010	6x4	10 mt	5.00 mt	40x28	150/500	11	32	-20°C/+60°C	1
SU20805025	8x5	2.5 mt	1.25 mt	45x29	150/500	13	38	-20°C/+60°C	1
SU20805050	8x5	5 mt	2.50 mt	45x29	150/500	13	38	-20°C/+60°C	1
SU20805075	8x5	7.5 mt	3.75 mt	45x29	150/500	13	38	-20°C/+60°C	1
SU20805010	8x5	10 mt	5.00 mt	45x29	150/500	13	38	-20°C/+60°C	1
<b>new</b> SU20805015	8x5	15 mt	7.50 mt	45x29	150/500	13	38	-20°C/+60°C	1
SU20805525	8x5.5	2.5 mt	1.25 mt	41x25	150/500	10	30	-20°C/+60°C	1
SU20805550	8x5.5	5 mt	2.50 mt	41x25	150/500	10	30	-20°C/+60°C	1
SU20805575	8x5.5	7.5 mt	3.75 mt	41x25	150/500	10	30	-20°C/+60°C	1
SU20805510	8x5.5	10 mt	5.00 mt	41x25	150/500	10	30	-20°C/+60°C	1
SU20106525	10x6.5	2.5 mt	1.25 mt	58x38	150/500	11	34	-20°C/+60°C	1
SU20106550	10x6.5	5 mt	2.50 mt	58x38	150/500	11	34	-20°C/+60°C	1
SU20106575	10x6.5	7.5 mt	3.75 mt	58x38	150/500	11	34	-20°C/+60°C	1
SU20106510	10x6.5	10 mt	5.00 mt	58x38	150/500	11	34	-20°C/+60°C	1
<b>new</b> SU20106515	10x6.5	15 mt	7.50 mt	58x38	150/500	11	34	-20°C/+60°C	1
SU20128025	12x8	2.5 mt	1.25 mt	75x51	150/500	10	30	-20°C/+60°C	1
SU20128050	12x8	5 mt	2.50 mt	75x51	150/500	10	30	-20°C/+60°C	1
SU20128075	12x8	7.5 mt	3.75 mt	75x51	150/500	10	30	-20°C/+60°C	1
SU20128010	12x8	10 mt	5.00 mt	75x51	150/500	10	30	-20°C/+60°C	1


SU 30



### Spirale poliuretano con raccordo maschio girevole

Polyurethane coils with rotating male fitting  
Polyurethanspiralen mit Bajonett

Colore standard: azzurro  
Standard colour: light blue  
Standard Farbe: Blau

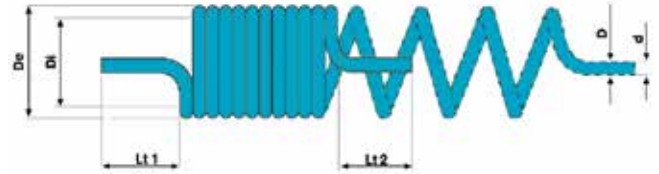

Su richiesta possiamo fornire spirali con diametri, lunghezze, colori e materiali diversi

On demand we can supply coils with diameters, lengths, colours and different materials

Auf Wunsch können wir Spiralen mit verschiedenen Durchmessern, Längen, Farben und Materialien zu liefern

Codice/Code	Attacco Connection Angriff	Diametri D. est. x d. int. Diameter D. ext. x d. int. Durchmesser D. Auß. x d. Inn	Lunghezza estesa Length tube Schlauch länge	Lunghezza lavoro Work length Betriebslänge	De x Di (mm)	Lt1 / Lt2 (mm)	Pressione di utilizzo (Bar) 23°C Working pressure (Bar) 23°C Betriebsdruck (Bar) 23°C	Temperatura di utilizzo Working temperature Betriebtemperatur	
SU30604050	1/4"	6x4	5 mt	2.5 mt	40x28	150/500	11	32	1
SU30604075	1/4"	6x4	7.5 mt	3.75 mt	40x28	150/500	11	32	1
SU30604010	1/4"	6x4	10 mt	5 mt	40x28	150/500	11	32	1
SU30805050	1/4"	8x5	5 mt	2.5 mt	45x29	150/500	13	38	1
SU30805075	1/4"	8x5	7.5 mt	3.75 mt	45x29	150/500	13	38	1
SU30805010	1/4"	8x5	10 mt	5 mt	45x29	150/500	13	38	1
<b>new</b> SU30805015	1/4"	8x5	15 mt	7.5 mt	45x29	150/500	13	38	1
SU30805550	1/4"	8x5.5	5 mt	2.5 mt	41x25	150/500	10	30	1
SU30805575	1/4"	8x5.5	7.5 mt	3.75 mt	41x25	150/500	10	30	1
SU30805510	1/4"	8x5.5	10 mt	5 mt	41x25	150/500	10	30	1
SU30106550	1/4"	10x6.5	5 mt	2.5 mt	58x38	150/500	11	34	1
SU30106575	1/4"	10x6.5	7.5 mt	3.75 mt	58x38	150/500	11	34	1
SU30106510	1/4"	10x6.5	10 mt	5 mt	58x38	150/500	11	34	1
<b>new</b> SU30106515	1/4"	10x6.5	15 mt	7.5 mt	58x38	150/500	11	34	1
SU30128050	3/8"	12x8	5 mt	2.5 mt	75x51	150/500	10	30	1
SU30128075	3/8"	12x8	7.5 mt	3.75 mt	75x51	150/500	10	30	1
SU30128010	3/8"	12x8	10 mt	5 mt	75x51	150/500	10	30	1
SU30128015	3/8"	12x8	15 mt	7.5 mt	75x51	150/500	10	30	1
SU30161150	3/8"	16x11	5 mt	2.5 mt	105x73	150/500	10	30	1
SU30161175	3/8"	16x11	7.5 mt	3.75 mt	105x73	150/500	10	30	1
SU30161110	3/8"	16x11	10 mt	5 mt	105x73	150/500	10	30	1
SU30161115	3/8"	16x11	15 mt	7.5 mt	105x73	150/500	10	30	1

Temperatura di utilizzo: da -20°C a +60°C

Working temperature: from -20°C to +60°C

Betriebstemperatur: von -20°C bis +60°C